




CLASS 75/150 FLANGES

ANSI B16.47 SERIES B

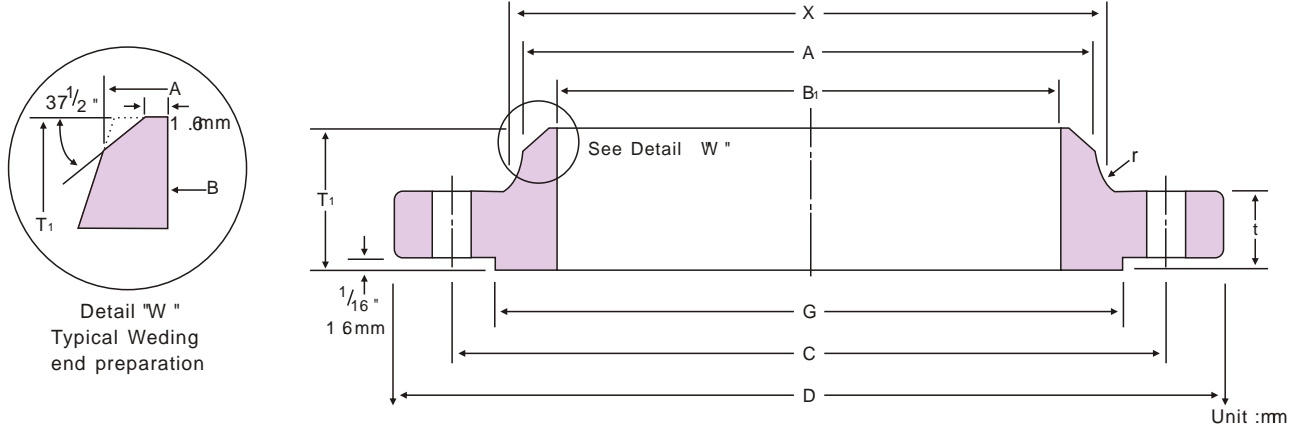

Nominal Pipe Size	Outside Diam .	O .D. of Raised Face	Diam . at Base of Hub	Thick - ness	BORE			Length Thru Hub	Diam . at Base of Hub	Radius at Base of Hub	DRILLING			Approximate Weight Pounds (kg)			
					Wall Thickness						T1	A	r		C	Number of Holes	Diam . of Holes
					6 .35mm	9 .5mm	12 .7mm										
	D	G	X	t	B1												
26	762	704.9	676.1	33.3	647.7	641.4	635.0	58.7	661.9	7.9	723.9	36	19.1	63.9 (29.01)			
28	813	755.7	726.9	33.3	698.5	692.2	685.8	62.0	712.7	7.9	774.7	40	19.1	68.3 (31.01)			
30	864	806.5	777.7	33.3	749.3	743.0	736.6	65.0	763.5	7.9	825.5	44	19.1	77.2 (35.05)			
32	914	857.3	828.5	35.1	800.1	793.8	787.4	69.9	814.3	7.9	876.3	48	19.1	105.8 (48.03)			
34	965	908.1	879.3	35.1	850.9	844.6	838.2	73.2	865.1	7.9	927.1	52	19.1	110.2 (50.03)			
36	1034	965.2	935.0	36.6	850.9	895.4	889.0	85.9	915.9	9.7	992.1	40	22.4	136.7 (62.06)			
38	1084	1016.0	985.8	38.1	952.5	946.2	939.8	88.9	966.7	9.7	1042.9	40	22.4	154.3 (70.05)			
40	1135	1066.8	1036.6	38.1	1003.3	997.0	990.6	91.9	1017.5	9.7	1093.7	44	22.4	163.1 (74.05)			
42	1186	1117.6	1087.4	39.6	1054.1	1047.8	1041.4	95.3	1068.3	9.7	1144.5	48	22.4	169.8 (77.09)			
44	1251	1174.8	1140.0	42.9	1104.9	1149.4	1143.0	104.6	1119.1	9.7	1203.5	36	25.4	180.8 (82.08)			
46	1302	1225.6	1190.8	44.5	1155.7	1149.4	1143.0	108.0	1169.9	9.7	1254.3	40	25.4	231.5 (105.01)			
48	1353	1276.4	1241.6	46.0	1206.5	1200.2	1193.8	111.3	1220.7	9.7	1305.1	44	25.4	264.6 (120.03)			
50	1403	1327.2	1293.9	47.8	1257.3	1251.0	1244.6	115.8	1271.5	9.7	1355.9	44	25.4	295.8 (134.28)			
52	1457	1378.0	1344.7	47.8	1308.1	1301.8	1295.4	120.7	1322.3	9.7	1409.7	48	25.4	313.2 (142.18)			
54	1508	1428.8	1397.0	49.3	1358.9	1352.6	1346.2	125.5	1373.1	9.7	1460.5	48	25.4	396.8 (180.15)			
56	1575	1485.9	1450.8	50.8	1409.7	1403.4	1397.0	134.9	1423.9	11.2	1521.0	40	28.4	406.6 (184.58)			
58	1626	1536.7	1501.6	52.3	1460.5	1454.2	1447.8	138.2	1474.7	11.2	1571.8	44	28.4	430.8 (195.56)			
60	1676	1587.5	1552.4	55.6	1511.3	1505.0	1498.6	144.5	1525.5	11.2	1622.6	44	28.4	463.0 (210.20)			

Unit :mm

Nominal Pipe Size	Outside Diam .	O .D. of Raised Face	Diam . at Base of Hub	Thick - ness	BORE			Length Thru Hub	Diam . at Base of Hub	Radius at Base of Hub	DRILLING			Approximate Weight Pounds (kg)			
					Wall Thickness						T1	A	r		C	Number of Holes	Diam . of Holes
					6 .35mm	9 .5mm	12 .7mm										
	D	G	X	t	B1												
26	786	711.2	684.3	41.1	647.7	641.4	635.0	88.9	661.9	9.7	744.5	36	22.4	114.6 (52.03)			
28	837	762.0	735.1	44.5	698.5	692.2	685.8	95.3	712.7	9.7	795.3	40	22.4	127.9 (58.07)			
30	887	812.8	787.4	44.5	749.3	743.0	736.6	100.1	763.5	9.7	846.1	44	22.4	143.3 (65.06)			
32	941	863.6	839.7	46.0	800.1	793.8	787.4	108.0	814.3	9.7	900.2	48	22.4	187.4 (85.08)			
34	1005	920.8	892.0	49.3	850.9	844.6	838.2	110.2	865.1	9.7	957.3	40	25.4	220.5 (100.11)			
36	1057	971.6	944.6	52.3	901.7	895.4	889.0	117.3	915.9	9.7	1009.7	44	25.4	253.5 (115.09)			
38	1124	1022.4	997.0	53.8	952.5	946.2	939.8	124.0	968.2	9.7	1069.8	40	28.4	297.5 (135.07)			
40	1175	1079.5	1049.3	55.6	1003.3	997.0	990.6	128.5	1019.0	9.7	1120.6	44	28.4	330.7 (150.14)			
42	1226	1130.3	1101.9	58.7	1054.1	1047.8	1041.4	133.4	1069.8	11.2	1171.4	48	28.4	363.8 (165.17)			
44	1276	1181.1	1152.7	60.5	1104.9	1098.6	1092.2	136.7	1120.6	11.2	1222.2	52	31.8	440.9 (200.17)			
46	1341	1234.9	1205.0	62.0	1155.7	1149.4	1143.0	144.5	1171.4	11.2	1284.2	40	31.8	463.0 (210.20)			
48	1392	1289.1	1257.3	65.0	1206.5	1200.2	1193.8	149.4	1222.2	11.2	1335.0	44	31.8	529.1 (240.21)			
50	1443	1339.9	1308.1	68.3	1257.3	1251.0	1244.6	153.9	1273.0	11.2	1385.8	48	31.8	552.4 (250.27)			
52	1494	1390.7	1360.4	69.9	1308.1	1301.8	1295.4	157.2	1323.8	11.2	1436.6	52	31.8	585.9 (265.77)			
54	1549	1441.5	1412.7	71.4	1358.9	1352.6	1346.2	162.1	1374.6	11.2	1492.3	56	31.8	683.4 (310.26)			
56	1600	1492.3	1465.3	73.2	1409.7	1403.4	1397.0	166.6	1425.4	14.2	1543.1	60	31.8	674.8 (306.08)			
58	1675	1543.1	1516.1	74.7	1460.5	1454.2	1447.8	174.8	1476.2	14.2	1611.4	48	35.1	810.6 (367.76)			
60	1726	1600.2	1570.0	76.2	1511.3	1505.0	1498.6	179.3	1527.0	14.2	1662.2	52	35.1	903.9 (410.37)			

Notes

- 'Bore' (B1) of flanges shall be specified by the purchaser.
- Class 75 flanges will be furnished with 0.06" (1.6mm) raised face ,which is included in "Thickness" (t) and "Length through Hub" (T1)